

# **SPECIFICATIONS**

#### **GENERAL**

Lustertone sink, 18 gauge, type 304 stainless steel, self-rimming with triple ledge.

#### **CLASSROOM/INSTITUTIONAL SINK PACKAGES**

Models **DRKR2822LC/RC** and **DRKAD2822LC/RC** feature a scratch and crack resistant stainless steel work sink, faucet and No Lead Flexi-Guard® Bubbler.

#### DRKR2822LC/RC Sink Packages include:

- (1) **LK413945RS** Single-lever faucet with hi-arc contemporary style restricted swing spout faucet. Spout height 10"; Reach 6-1/2".
- (1) LK1141A No Lead Flexi-Guard® Bubbler. Pushbutton valve design bubbler meets ANSI and ADA requirements. Designed so that water never comes in contact with leadcontaining materials. Flexi-Guard safety bubbler flexes on impact to prevent accidental injury when getting a drink. Built-in adjustable water volume control.
- (1) LK35 Duo strainer.

### DRKAD2822LC/RC Sink Packages include:

- LK413945RS Single-lever faucet with hi-arc contemporary style restricted swing spout faucet. Spout height 10"; Reach 6-1/2".
- (1) **LK1141A** No Lead Flexi-Guard® Bubbler. Pushbutton valve design bubbler meets ANSI and ADA requirements. Designed so that water never comes in contact with lead-containing materials. Flexi-Guard safety bubbler flexes on impact to prevent accidental injury when getting a drink. Built-in adjustable water volume control.
- (1) **LKAD35** Duo strainer with offset tailpiece.

#### **OTHER**

Drain Opening: 3-1/2".

These sinks comply with ANSI Standard A112.19.3M.



Bubbler and faucet are classified by Underwriters Laboratories Inc. to **ANSI/NSF61** for residential use.

#### **SINK DIMENSIONS (INCHES)\***

	Overall		Inside Bowl			Cutout in Countertop (11/2" Radius		Chin
Model	L	W	L	W	D	` Corners)		Ship. Wt.
Number	Α	В	C	D	E	L	W	Lbs.
DRKR2822LC/RC	28	22	19	16	71/2	273/8	21%	23
DRKAD2822LC/RC	28	22	19	16	**	273/8	21¾	25

 $<sup>^{\</sup>star}\,$  Length is left to right. Width is front to back.



SEE OTHER SIDE FOR PRODUCT DIMENSIONS.


In keeping with our policy of continuing product improvement, Elkay reserves the right to change product specifications without notice.


This specification describes an Elkay product with design, quality and functional benefits to the user. When making a comparison of other producers' offerings, be certain these features are not overlooked.

<sup>\*\*</sup>Available in 5-1/2", 6" and 6-1/2" depths. Please consult your sales representative for other depths or modifications.





# **SPECIFICATIONS**






## **HOLE CONFIGURATIONS**





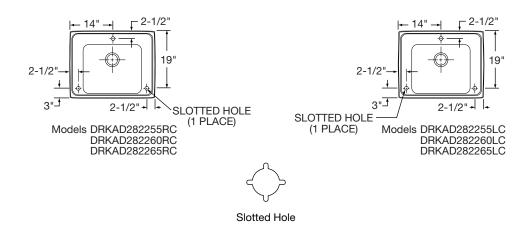

ALL DIMENSIONS IN INCHES, TO CONVERT TO MILLIMETERS MULTIPLY BY 25.4.